


Bay Window Repair, Cracks in Various Places around Bay

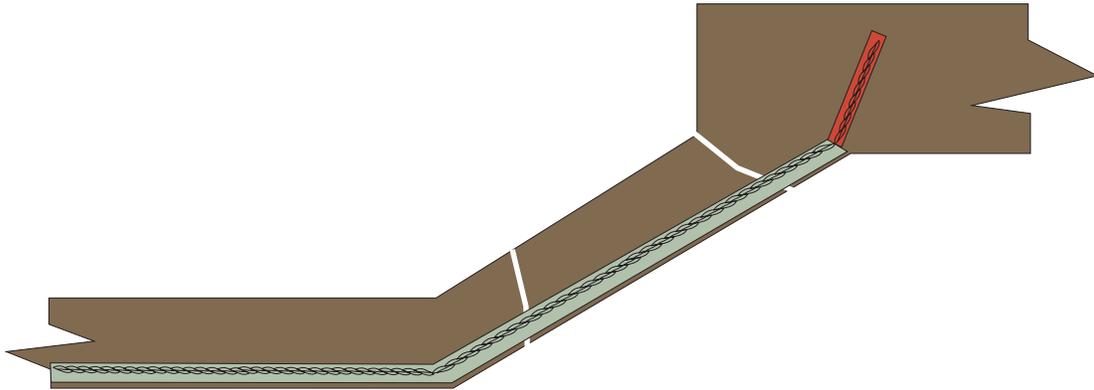

- (1) Cut out horizontal slots to specified depth and at required vertical spacings, continue slots into bay junction.
- (2) Blow out slots and thoroughly flush with water.
- (3) Where slots meet an internal corner, drill 10 mm hole into the adjoining wall as shown.
- (4) Blow out hole to remove dust debris.
- (5) Cut Tri-bar to required length and bend the end to suit hole and slot.
- (6) With the aid of a grout gun insert a 10mm bead of Cemspand cementitious grout into the back of the slot.
- (7) Fill hole with Tri- set resin push Tri-bar rod into the resin and grout until a good coverage is achieved.
- (8) Insert a final 10mm bead of Cemspand cementitious grout over the exposed rod and iron into slot using a finger trowel.
- (8) When Cemspand has set replaster joints.

Installation Notes: Unless specified otherwise the following criteria are to be used.

- a) The depth of slot to be 25 to 35mm (not including plaster).
- b) Normal vertical spacing of crack stitching is 450mm and Tri-bars to extend 500mm beyond any cranks in the Bay.